



HOW TO SET A+HEADING LINE, GS2 2600, GS3 2630

STEP 1 JOHN DEERE

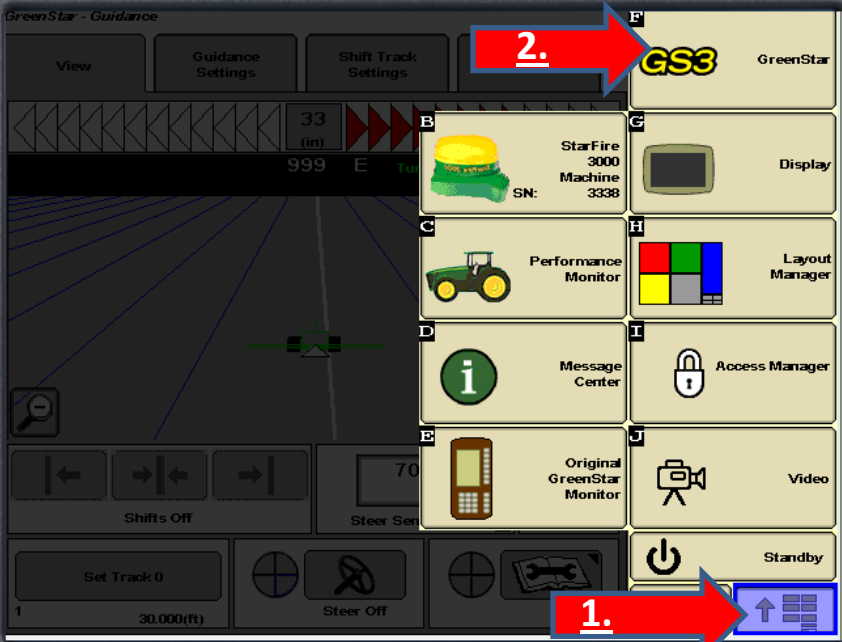


1. MAIN MENU BUTTON
2. GS2 / GS3 BUTTON

STEP 2 JOHN DEERE

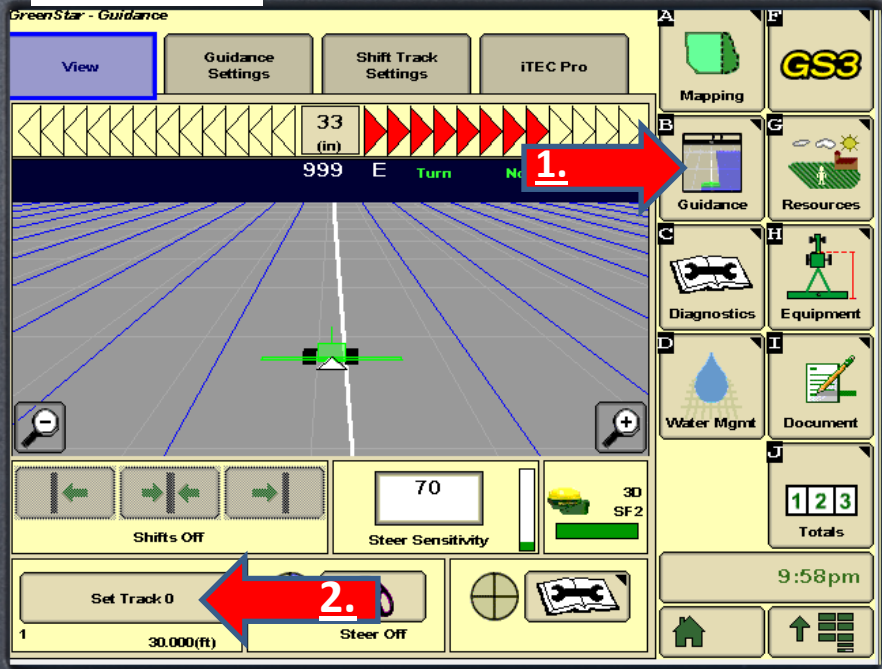

1. SELECT GUIDANCE (BUTTON B)
2. SELECT SET TRACK 0

1. SELECT ALREADY STORED TRACK **OR** NEW TO CREATE NEW TRACK. YOU MUST NAME A NEW TRACK BEFORE YOU CAN CREATE IT
2. SELECT A + HEADING
3. SET OR CHANGE TRACK SPACING
4. SET POINT A
5. ENTER DESIRED HEADING
6. ACCEPT NEW TRACK

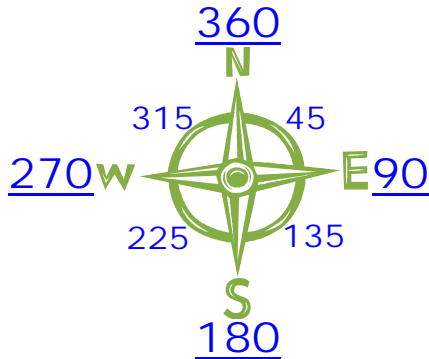

STEP 3 Set Track 0

Current Track 0: Track 1 Method: A + Heading

New Remove

Heading: 90
Point A Lat: 41.48453584
Point A Lon: -90.50231954

Track Spacing (ft): 60.000 Desired Heading: 90

Set A

≡ ➔

STEP 4 JOHN DEERE

GreenStar - Guidance

View Guidance Settings Shift Track Settings iTEC Pro

33 (in) 999 E Turn None

70 3D SF2

Shifts Off 70 30.000(ft) Steer Off

10:00pm

IF A-B LINE HAS BEEN SET UP SUCCESSFULLY YOU WILL SEE WHITE LINE (ACTIVE LINE) AND BLUE LINES (NON ACTIVE LINES) SIMILAR TO THE LINES PICTURED

1. TURN STEERING ON

FINAL STEP

1. RESUME BUTTON, IN MOST TRACTORS IT LOOKS SIMILAR TO BUTTON SHOWN. COMBINES AND SPRAYERS BUTTONS ARE ON JOY STICK BUT NOT MARKED WITH STEERING WHEEL, CHECK OWNERS MANUAL

